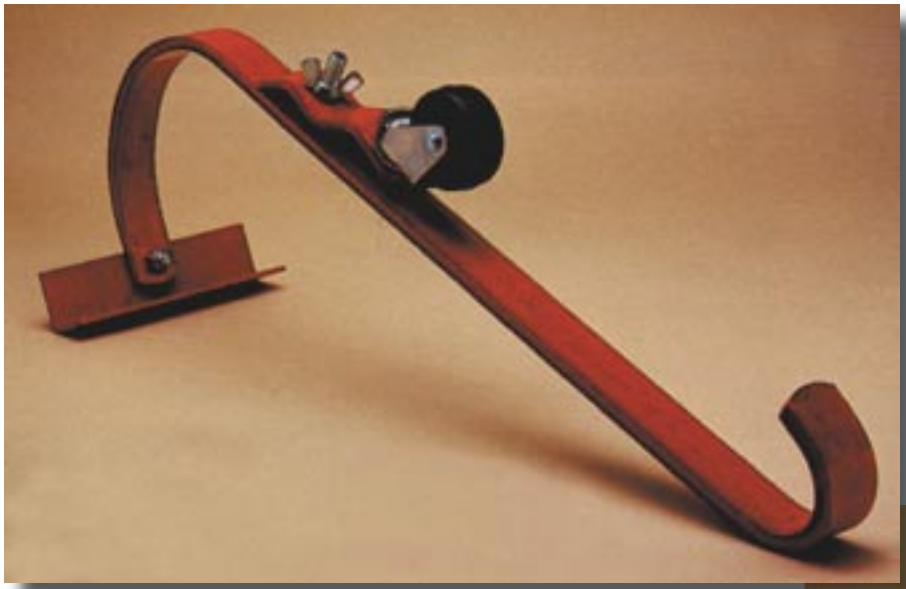

Ladder Hook with Wheel

Model #2481

Ladder Hook without Wheel

Model # 2480

Fits single or extension ladders in wood, fiberglass, and aluminum in round and "D" rung styles. Constructed of steel for strength, durability, and safety, and adjusts to fit between top two ladder rungs.

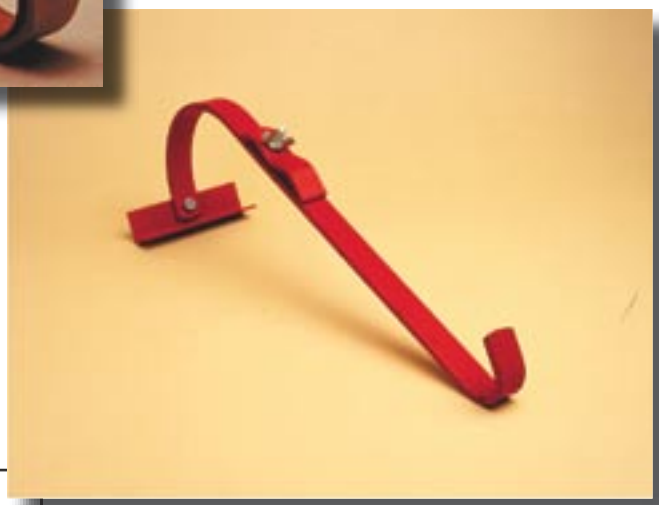

Product Specifications

Model #	2480	2481
Description:	Ladder Hook	Ladder Hook w/ Roller
Unit Pack:	1	1
Weight per Pack:	11 Pounds	14 Pounds
Cu. Ft. per Pack:	.13 cu. ft.	.15 cu. ft.

LADDER HOOK W/WHEEL

MODEL # 2480, #2481

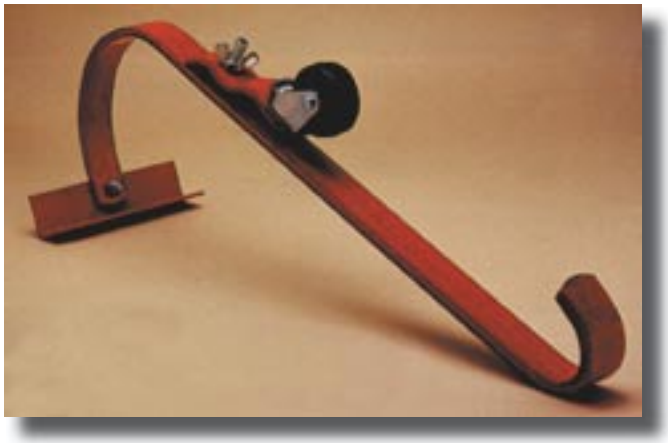

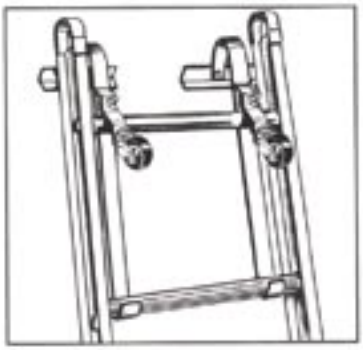

Model # 2480 Ladder Hook
Model # 2481 Ladder Hook with Wheels

1) Install two #2480 or two #2481 Ladder Hooks as pictured onto the top two rungs of the ladder. Secure in place by clamping the bottom of the ladder hook around the lower of the two ladder rungs. Then secure roof hook to the upper ladder rung with the rung clip by tightening the wing nut and bolt. Check to insure that each hook is resting up against a corresponding side-rail of the ladder.

2) With the hook facing up, slide the ladder up past the peak of the roof. Turn the ladder over so that the two hooks rest on the opposite side of the roof peak. The ladder should be flat on the roof with the angle clip at right angle to the hook and resting securely against the roof's surface. Always install two ladder hooks per ladder.

This product is not recommended for use on roofs with vented ridges.

⚠ WARNING

Failure to read and follow instructions on the use of this product could result in serious personal injury. This product must be used in strict compliance with Local, State & Federal OSHA Regulations. Be safety conscious.

qual·craft INDUSTRIES,INC.

Customer Support and Ordering Information

781-344-1000 • www.qualcraft.com